


INSTALLATION DIMENSIONS 安装尺寸

Coil Must Be Installed With Lettering Up
安装线圈时字母必须朝上

Unit=Millimeters

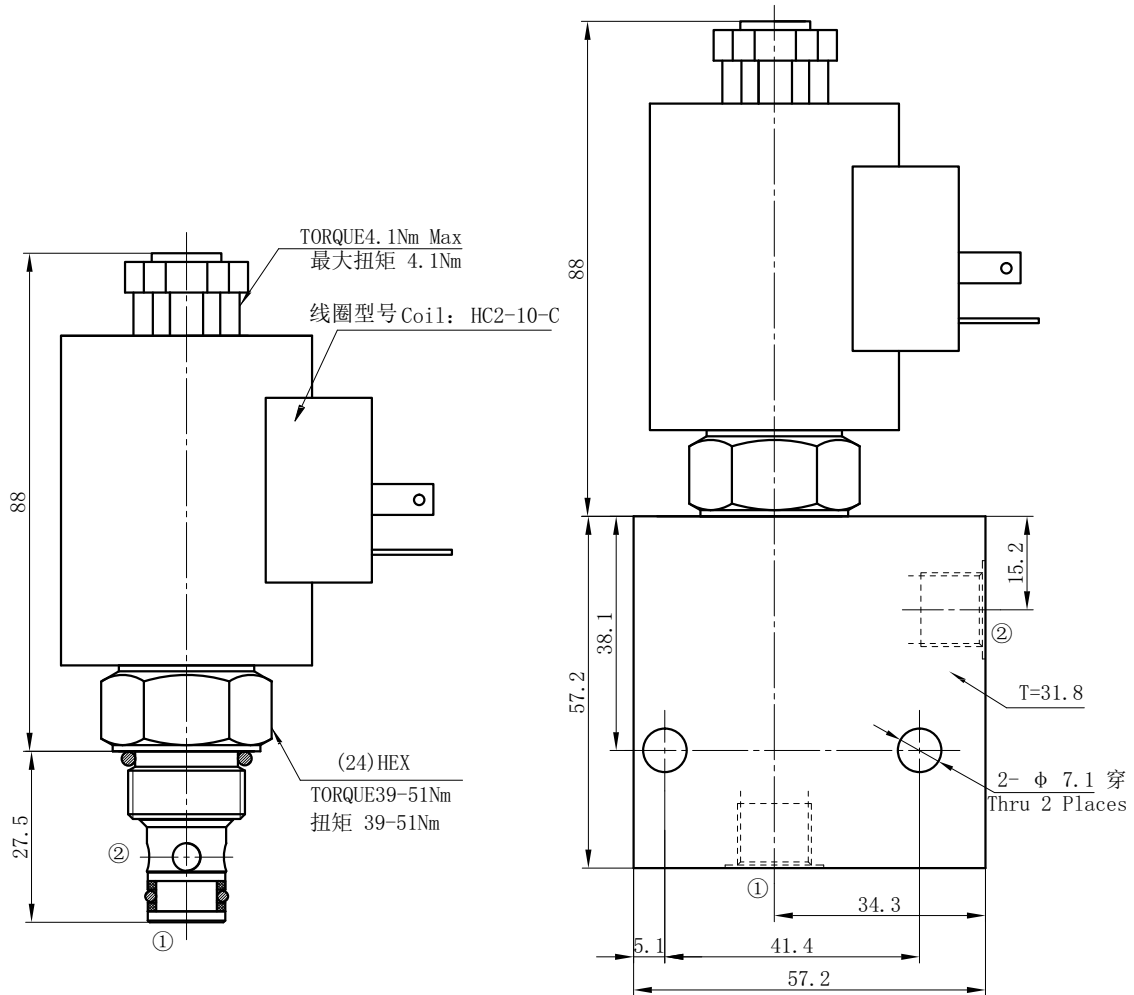

电磁阀 Solenoid Valve	HSV6	08	2	RNOR	P	*	*	*	*	*
Cavity 插孔										
Flow Path 流道类型										
Normally Open 常开型										
Poppet 锥阀型										
M=Manual Override 手动卸荷 Omit for standard 省略为常规										
VOLTAGE 电压 1=12V Volt DC 2=24V Volt DC 3=110V Volt AC 4=220V Volt AC										
BODY PORTING 阀块油口 6T=SAE6 3G=G3/8										
COIL CONNECTION 线圈连接 D=Double Lead 双线 H=Hirschmann 三插 ER=Deutsch Connector (Water proof Coil) 德意志插座 (防水线圈)										