
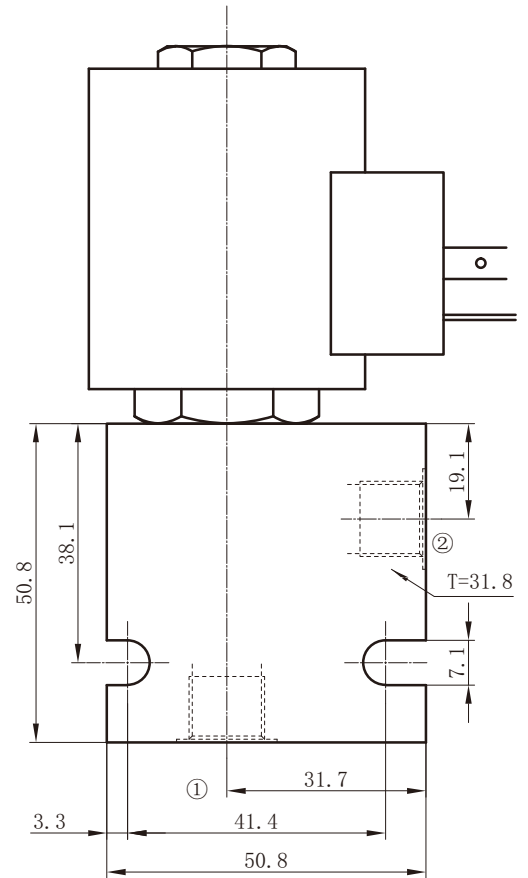


INSTALLATION DIMENSIONS 安装尺寸

Coil Must Be Installed With Lettering Up
安装线圈时字母必须朝上

Unit=Millimeters

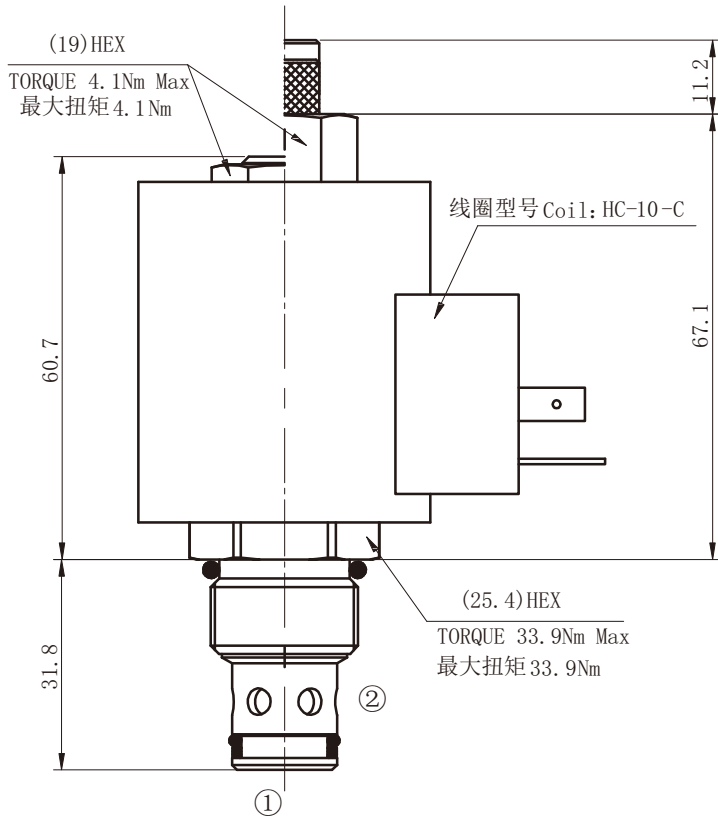

HSV10-25 * * * * *

电磁阀 Solenoid Valve

M=Manual Override 手动卸荷
Omit for standard 省略为常规

油封 Seal Kits
无 = 丁晴橡胶 (标准型)
Omit for Buna N (standard)

VOLTAGE 电压
1=12V Volt DC
2=24V Volt DC
3=110V Volt AC
4=220V Volt AC

BODY PORTING 阀块油口
6T=SAE6
8T=SAE8
3G=G3/8
4G=G1/2
Other Porting is Available
其它螺纹油口也是可以选择的
(Omit for Cartridge only
省略为不带阀块)

COIL CONNECTION 线圈连接
D=Double Lead 双线
H=Hirschmann 三插
ER=Deutsch Connector
(Water proof Coil)
德意志插座 (防水线圈)